




HDP-ILN Induction Loop Neckband

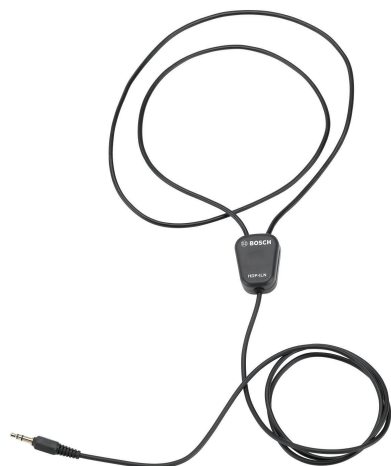

- ▶ **Lightweight**
- ▶ **Used with 'T-coil' hearing aids**

Functions

This induction loop neckband can be used with:

- Integrus receivers
- CCS800 unit
- DCN unit

The neckband magnetically couples the sound signal from the headphone output to a 'T-coil' hearing aid.

Interconnections

- 0.9 m (3ft) cable terminated with a 3.5 mm (0.14 in) gold-plated plug

Technical Specifications

Mechanical

Weight	45 g (0.10 lb)
Color	Charcoal with silver

Ordering Information

HDP-ILN Induction Loop Neckband Lightweight neckband.	HDP-ILN
-----------------------------------------------------------------	----------------

Americas:

Bosch Security Systems, Inc.
Communications Systems
12000 Portland Avenue, South
Burnsville, Minnesota 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@US.bosch.com
www.boschcommunications.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3453
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by